


NO.	DESCRIPTION	MAKER	MODEL No.
-----	-------------	-------	-----------

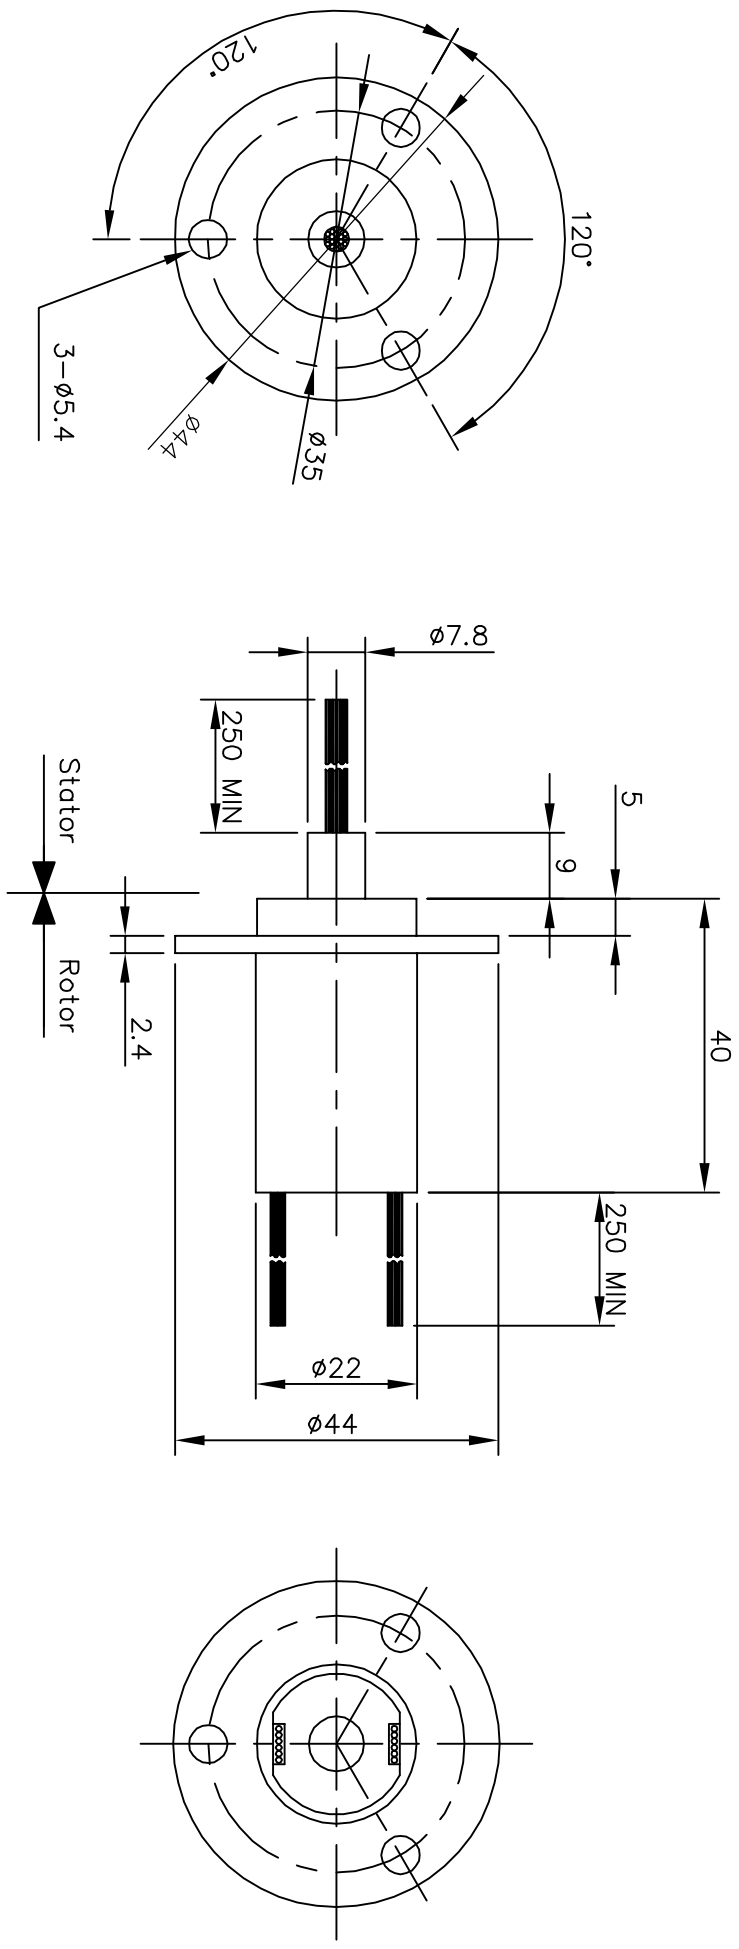

- NOTE.
- Speed : 0-250 RPM
 - Number of Ring : 3
 - Voltage : 380VDC & 380VAC
 - Current : 15Amp per Circuit, Maximum
 - Contact Material : Gold to Gold
 - Temperature : -40℃ ~ +80℃
 - Leadwire : #14 AWG, UL Teflon Wire(Silver Plated Copper)
 - Rotation : Bi-Directional
 - Insulation Resistance : 1000 Megohms Min. at 500 VDC
 - Dielectric Strength : Between each circuit and all other circuits

- Electrical noise : 70 Milliohm Max. tested @5 rpm
- Electrical noise : 70 Milliohm Max. tested @6 VDC, 50 millamps when running

01	WR-C003(15A)									
NO	PART NAME	MATERIAL	QTY	SIZE	COATING METHOD	PROJECTION	REMARK			
DRAWING	DESIGN	CHECKED	APPROVE	PRINT SCALE						
LEE.Y.S	KIM.W.B	KIM.W.B	N : S	A3			우리슬립링			
TOLERANCE	0 ~ 10	+0.02	CHAMFER	C = 0.3			DRAWING NO.			
	11 ~ 30	+0.05	FILET	R = 0.3			WR-C003-01(15A)			
	31 ~ 50	+0.10	ANGLE	40° 20'						
	51 ~ 100	+0.15	HOLE PITCH	+0.05						
	100 ~	+0.20								

NO.	COLOR
1	빨간
2	검정
3	노랑

1	1
---	---