NO.	DESCRIPTION	MAKER	MODEL No.

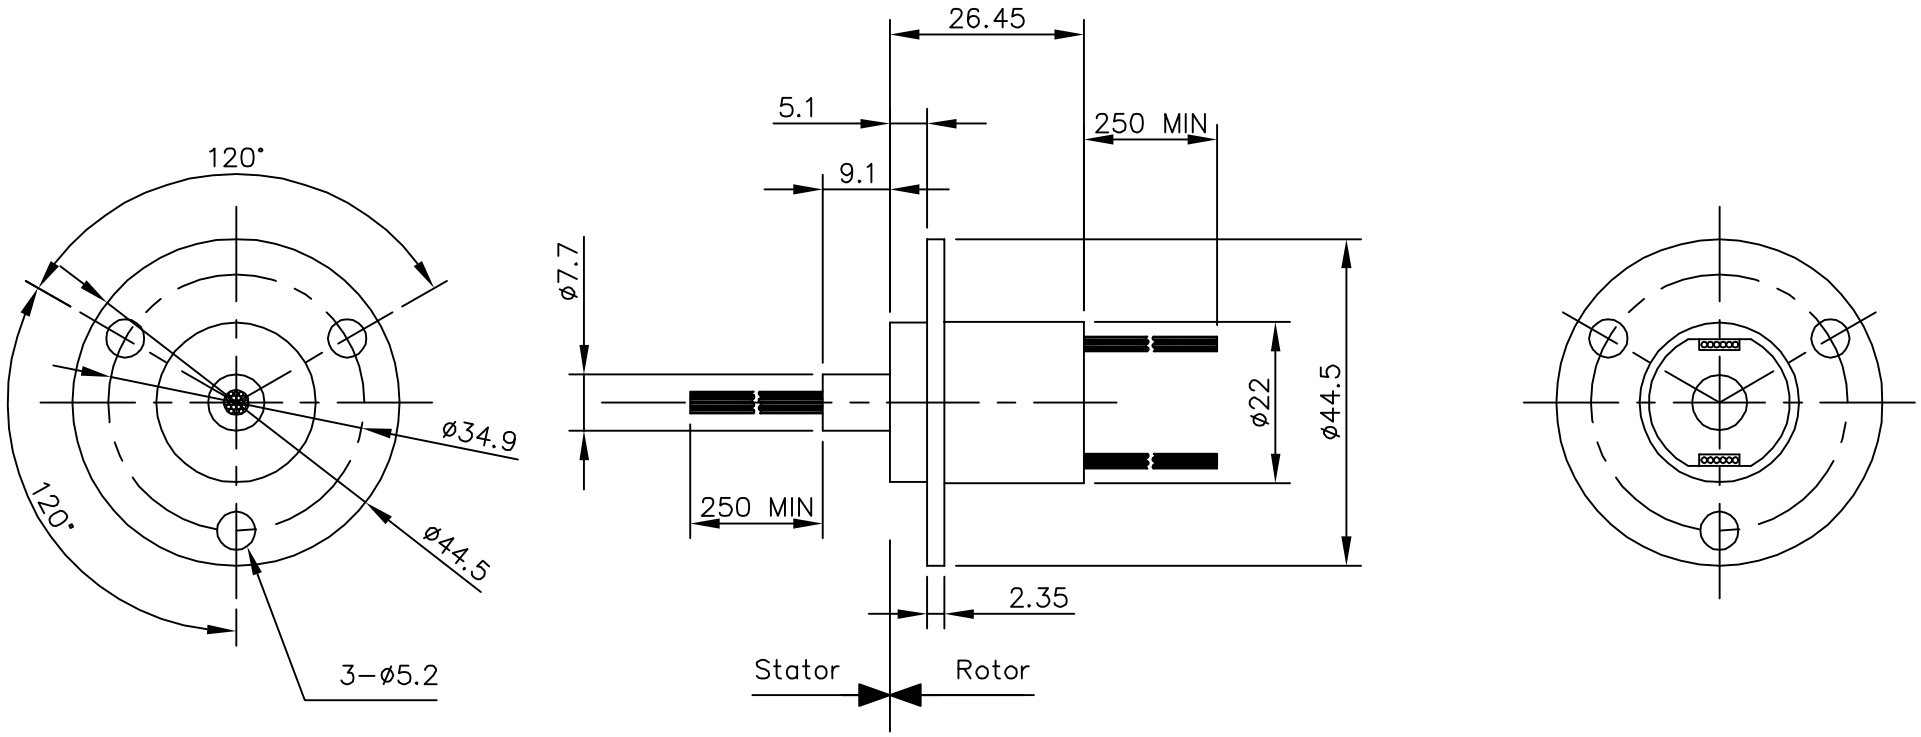

NOTE.

1. Speed : 0-250 RPM
2. Number of Ring : 12
3. Voltage : 210VDC & 240VAC
4. Current : 2Amp per Circuit, Maximum
5. Contact Material : Gold to Gold
6. Temperature : -40℃ ~+80℃
7. Leadwire : #28 AWG, UL Teflon Wire(Silver Plated Copper)
8. Rotation : Bi-Directional
9. Insulation Resistance : 1000 Megohms Min. at 500 VDC
10. Dielectric Strength : Between each circuit and all other circuits

    250VAC @50Hz
11. Electrical noise : 70 Milliohm Max. tested @6 VDC, 50 milliamps when running @5 rpm

NO.	COLOR	NO.	COLOR
1	검정	7	보라
2	빨강	8	회색
3	초록	9	노랑
4	주황	10	갈색
5	파랑	11	투명
6	백색	12	분홍

NO	PART NAME	MATERIAL	Q'TY	COATING METHOD	REMARK
01	WR-C012				

DRAWING	DISIGN	CHECKED	APROVE	PRINT SCALE	SIZE	PROJECTION
LEE.Y.S		KIM.W.B	KIM.W.B	N : S	A3	
				DATE	2013.02.04	

우리슬립링

TOLERANCE				
0 ~ 10	±0.02	CHAMFER	C = 0.3	
11 ~ 30	±0.05	FILLET	R = 0.3	
31 ~ 50	±0.10	ANGLE	±0°20'	
51 ~ 100	±0.15	HOLE PITCH	±0.05	
100 ~	±0.20			

DRAWING NO.
WR-C012-01

1/1