SPECIFICTAION	
Number of Circuit	10 amps/circuit(17AWG)
Operating Speed	100rpm continuous
Lead Lengths	500mm
Voltage	Max. 220VAC/210VDC
Current Rating	3 circuit
Contact Material	Gold to Gold
Lead Size/Type	Silver plated copper Type Teflon insulated
Noise	100milliohms max

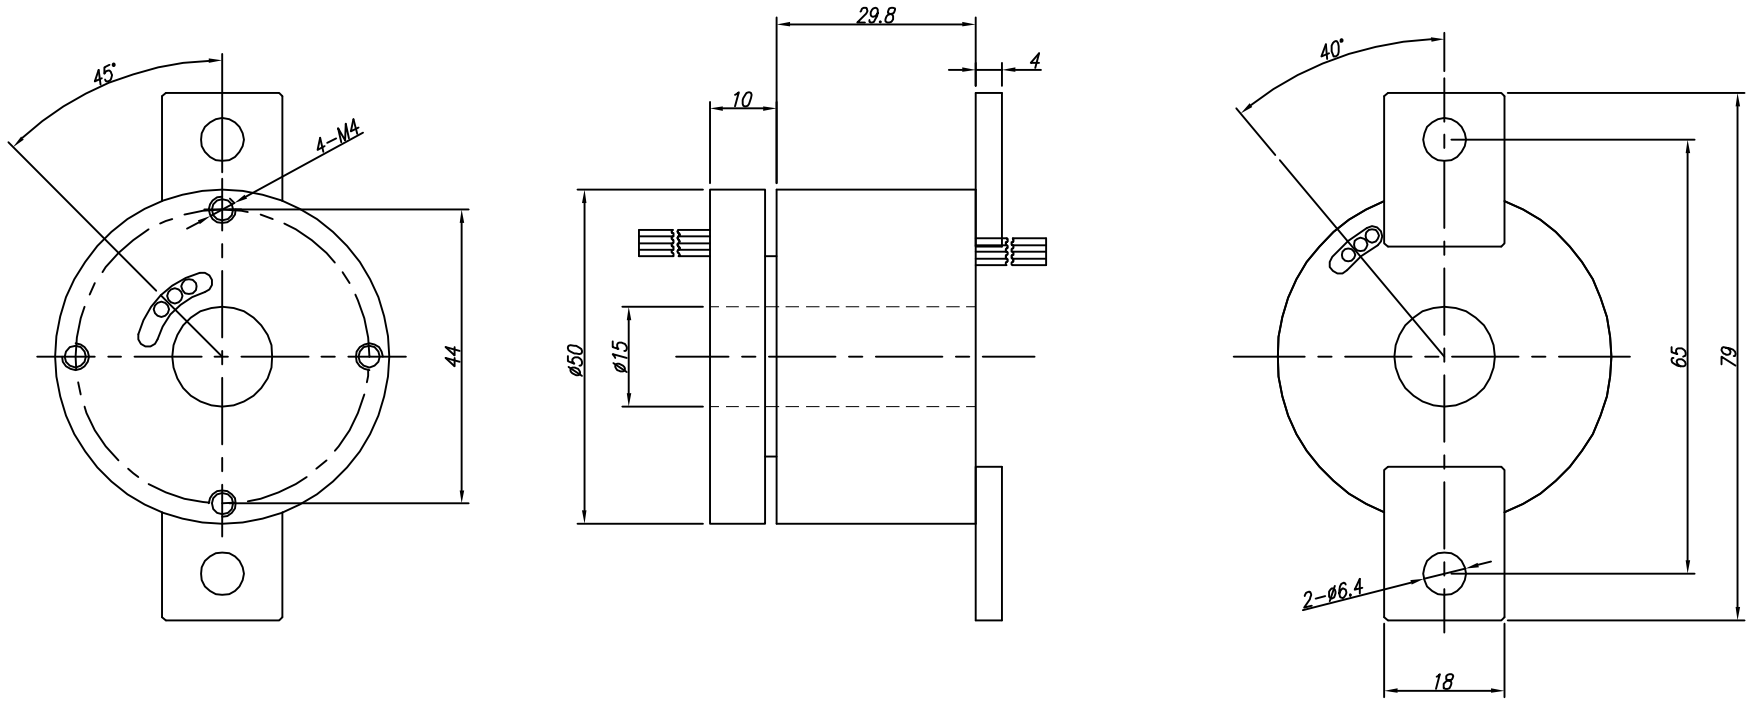

NOTE.
1. 날카로운 모서리 제거
2. 표기하지 않은 치수는 CAD 데이타 참고할 것.
3. 지시하지 않은 모따기는 C0.3 , 라운드는 R1

NO	PART NAME	MATERIAL	Q'TY	COATING METHOD	REMARK
01	WR-CB003(10A)	xxx	x		

DRAWING	DISIGN	CHECKED	APROVE	PRINT SCALE	SIZE	PROJECTION
LEE.Y.S		KIM.W.B	KIM.W.B	N : S	A3	
				DATE	2012.00.00	

우리슬립링

TOLERANCE				
0 ~ 10	±0.02	CHAMFER	C = 0.3	
11 ~ 30	±0.05	FILLET	R = 0.3	
31 ~ 50	±0.10	ANGLE	±0°20'	
51 ~ 100	±0.15	HOLE PITCH	±0.05	
100 ~	±0.20			

DRAWING NO.
WR-CB003(10A)-00-A

1/1