



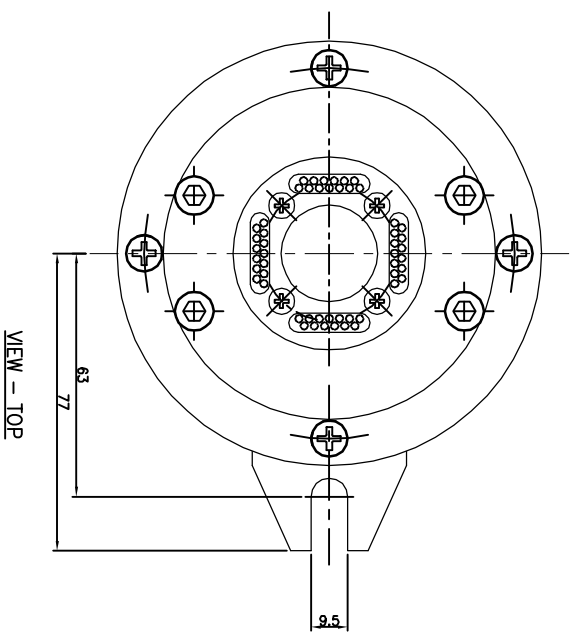

SPECIFICATION	
Number of Circuit	12 ~ 60 Circuit
Operating Speed	100 rpm continuous
Lead Lengths	500mm
Voltage	Max. 380VDC/VAC
Current Rating	3amps/circuit(22AWG) , 10amps/2circuit(16AWG)
Contact Material	Gold to Gold
Lead Size/Type	Silver plated copper Type Teflon insulated
Noise	100milliohms max
Rotary Pitting	Air 1ch. 3/8" PT. #8~#12 Hose

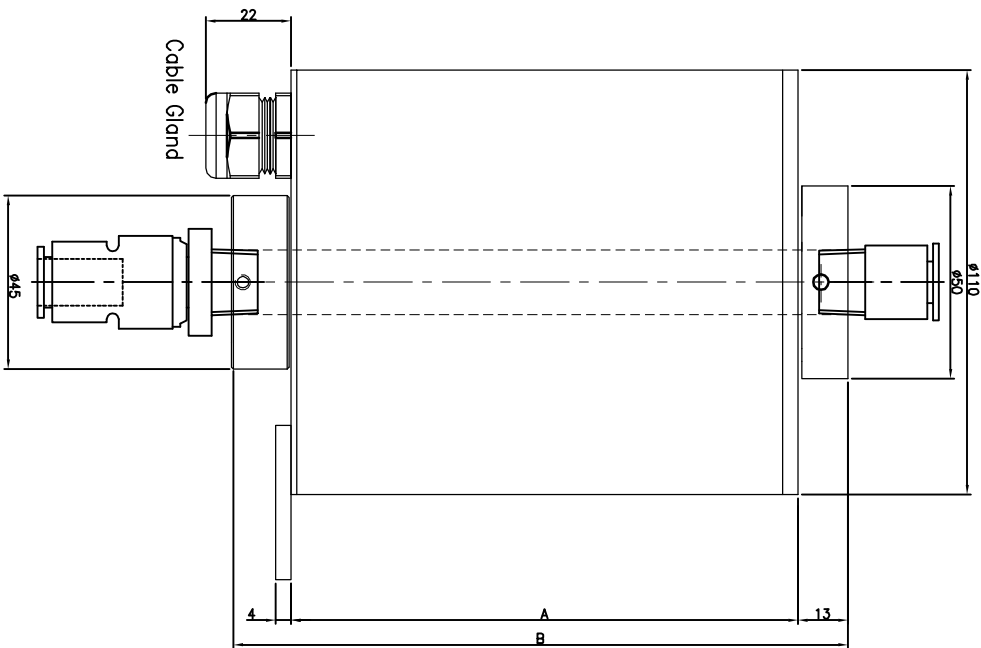

VIEW - TOP

도면 번호	A	B	NO	01	WR-MBXX01-01	PART NAME	WR-MBXX01-01	MATERIAL	QTY	COATING METHOD	REMARK
WR-MB1201-01-A	71.3	99	DRAWING	DESIGN	CHECKED	APPROVE	PRINT SCALE	SIZE		PROJECTION	
WR-MB2401-01-A	107.3	135	LEEY'S		KIM,W.B	KIM,W.B	N : S	A3			
WR-MB3201-01-A	131.3	159	TOLERANCE		\$0.02	CHAMFER	C = 0.3				
WR-MB4801-01-A	179.3	207	0 ~ 10	11 ~ 30	\$0.05	FILLET	R = 0.3				
WR-MB6001-01-A	215.3	243	31 ~ 50	51 ~ 100	\$0.10	ANGLE	\$0*30				
			100 ~	\$0.20	\$0.15	HOLE FITCH	\$0.05				
				DRAWING NO.	WR-MBXX01-01-A				1	1	

NOTE.

1. 발카로운 모서리 제거
2. 표기하지 않은 치수는 CAD 데이터 참고할 것.
3. 지시하지 않은 모따기는 CO.3 , 라운드는 R1

