SPECIFICTAION	
Number of Circuit	3 amps/circuit (22AWG), 15 amps/2circuit(16AWG)
Operating Speed	100rpm continuous
Lead Lengths	300mm
Voltage	Max. 380VDC/VAC
Current Rating	12 ~ 32 circuit
Contact Material	Gold to Gold
Lead Size/Type	Silver plated copper Type Teflon insulated
Noise	100milliohms max
Rotary Joint	Air 1ch, 1/4" or 1/8" PT, ⌀4~⌀10 Hose

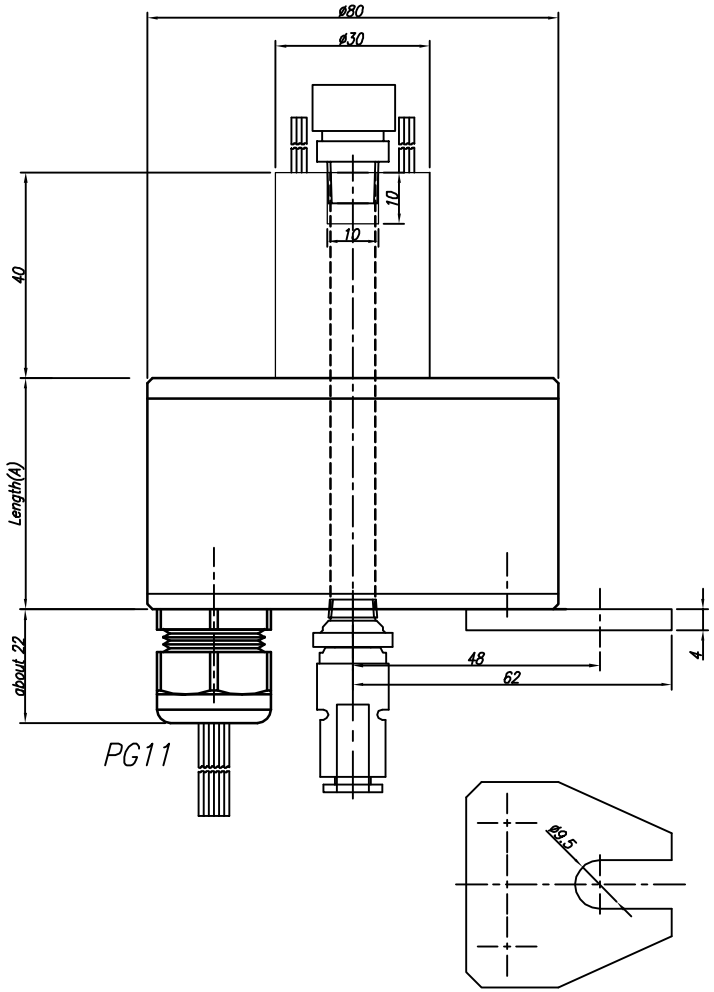

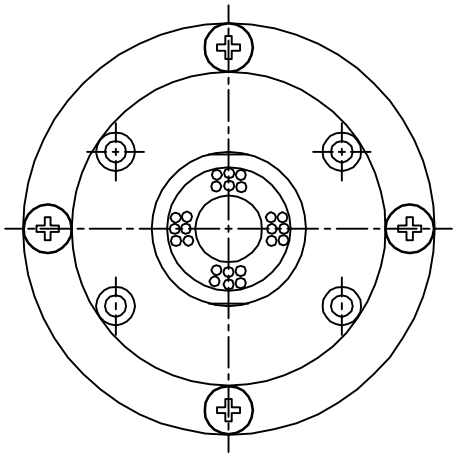

VIEW – TOP

도면번호	Port	Length(A)
WR-MH1201-01-A	12	62.6
WR-MH2401-01-A	24	91.4
WR-MH3201-01-A	32	110.6

NO	PART NAME	MATERIAL	Q'TY	COATING METHOD	REMARK
01	WR-MHXX01-01(A Type)				

DRAWING	DISIGN	CHECKED	APROVE	PRINT SCALE	SIZE	PROJECTION
LEE.Y.S		KIM.W.B	KIM.W.B	N : S	A3	
				DATE	2013.02.04	

우리슬립링

TOLERANCE				
0 ~ 10	±0.02	CHAMFER	C = 0.3	
11 ~ 30	±0.05	FILLET	R = 0.3	
31 ~ 50	±0.10	ANGLE	±0°20'	
51 ~ 100	±0.15	HOLE PITCH	±0.05	
100 ~	±0.20			

DRAWING NO.
WR-MHXX01-01-A

1/1