


SPECIFICATION	
Number of Circuit	5 amps/circuit (20AWG)
Operating Speed	100rpm continuous
Lead Lengths	2,000mm
Voltage	Max. 220VDC/VAC
Current Rating	5A 7/circuit
Contact Material	Gold to Gold
Lead Size/Type	Silver plated copper Type Teflon Insulated
Noise	100milliohms max

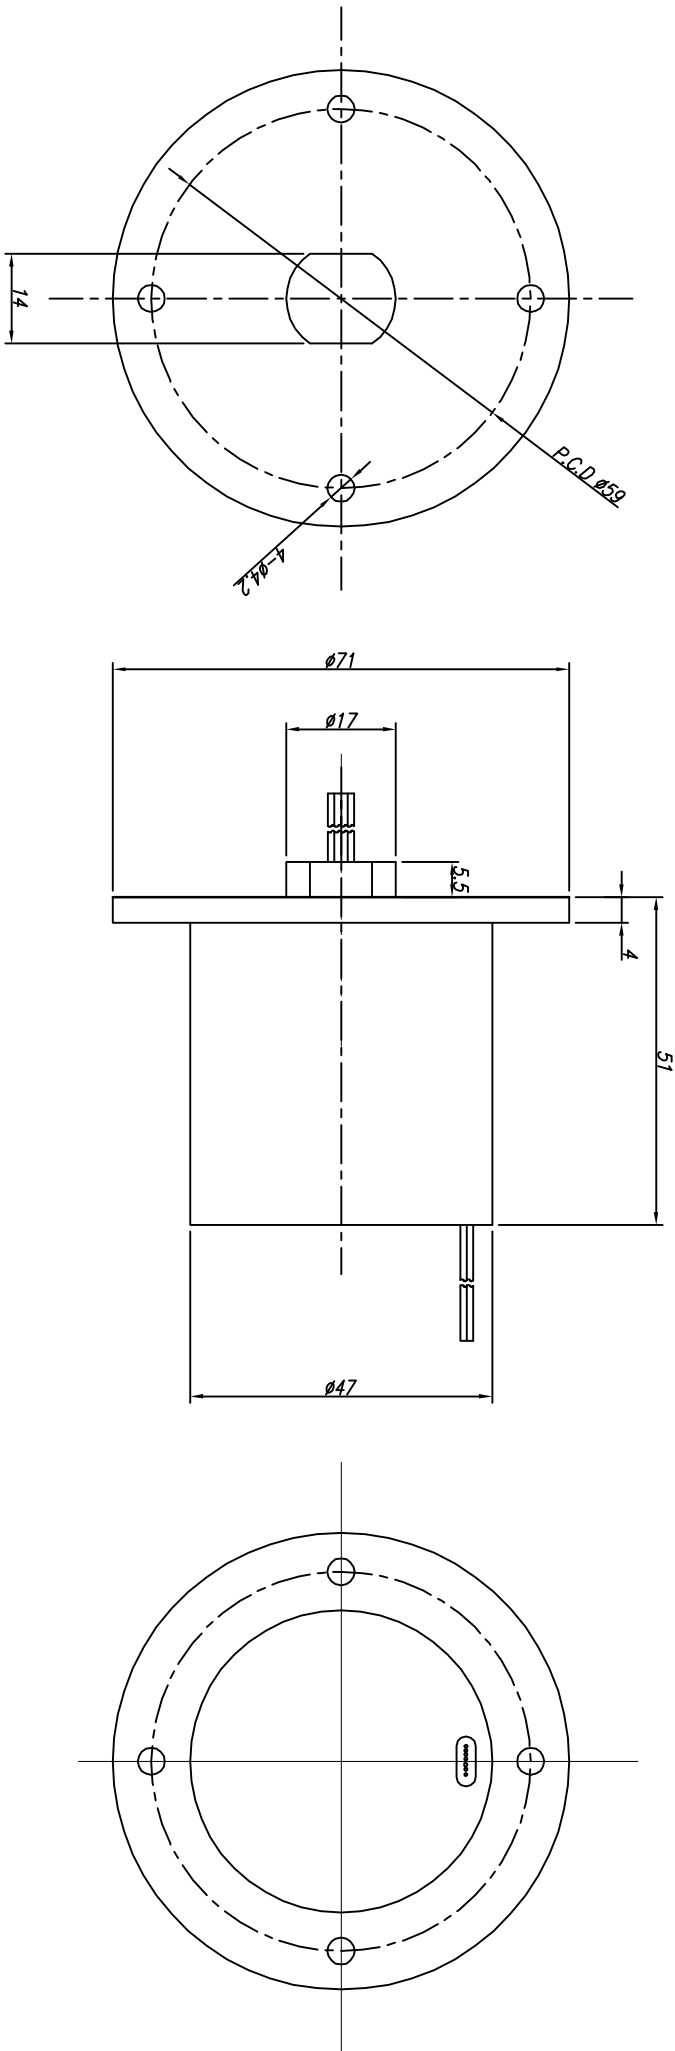

01	WR-SS007(5A)											
NO	PART NAME	CHECKED	APPROVE	MATERIAL	PRINT SCALE	QTY	SIZE	COATING METHOD	REMARK			
DRAWING	DESIGN	KIM,W,B	KIM,W,B	N : S	A3			PROJECTION				
LEE,Y,S				DATE	2007.12.11							
				CHAMFER	C = 0.3							
				FILET	R = 0.3							
				ANGLE	$\phi 0^{\circ}20'$							
				HOLE PITCH	$\phi 0.20$							
TOLERANCE		0 ~ 10	± 0.02									
		11 ~ 30	± 0.05									
		31 ~ 50	± 0.10									
		51 ~ 100	± 0.15									
		100 ~	± 0.20									
				DRAWING NO.	WR-SS007(5A)-00-B							
				1								
				1								

우 리 슬 립 잉