SPECIFICTAION	
Number of Circuit	5 amps/circuit (20AWG), 30 amps/2circuit(12AWG)
Operating Speed	100rpm continuous
Lead Lengths	500mm
Voltage	Max. 220VDC/380VAC
Current Rating	30A 2circuit , 5A 2circuit
Contact Material	Gold to Gold
Lead Size/Type	Silver plated copper Type Teflon insulated
Noise	100milliohms max

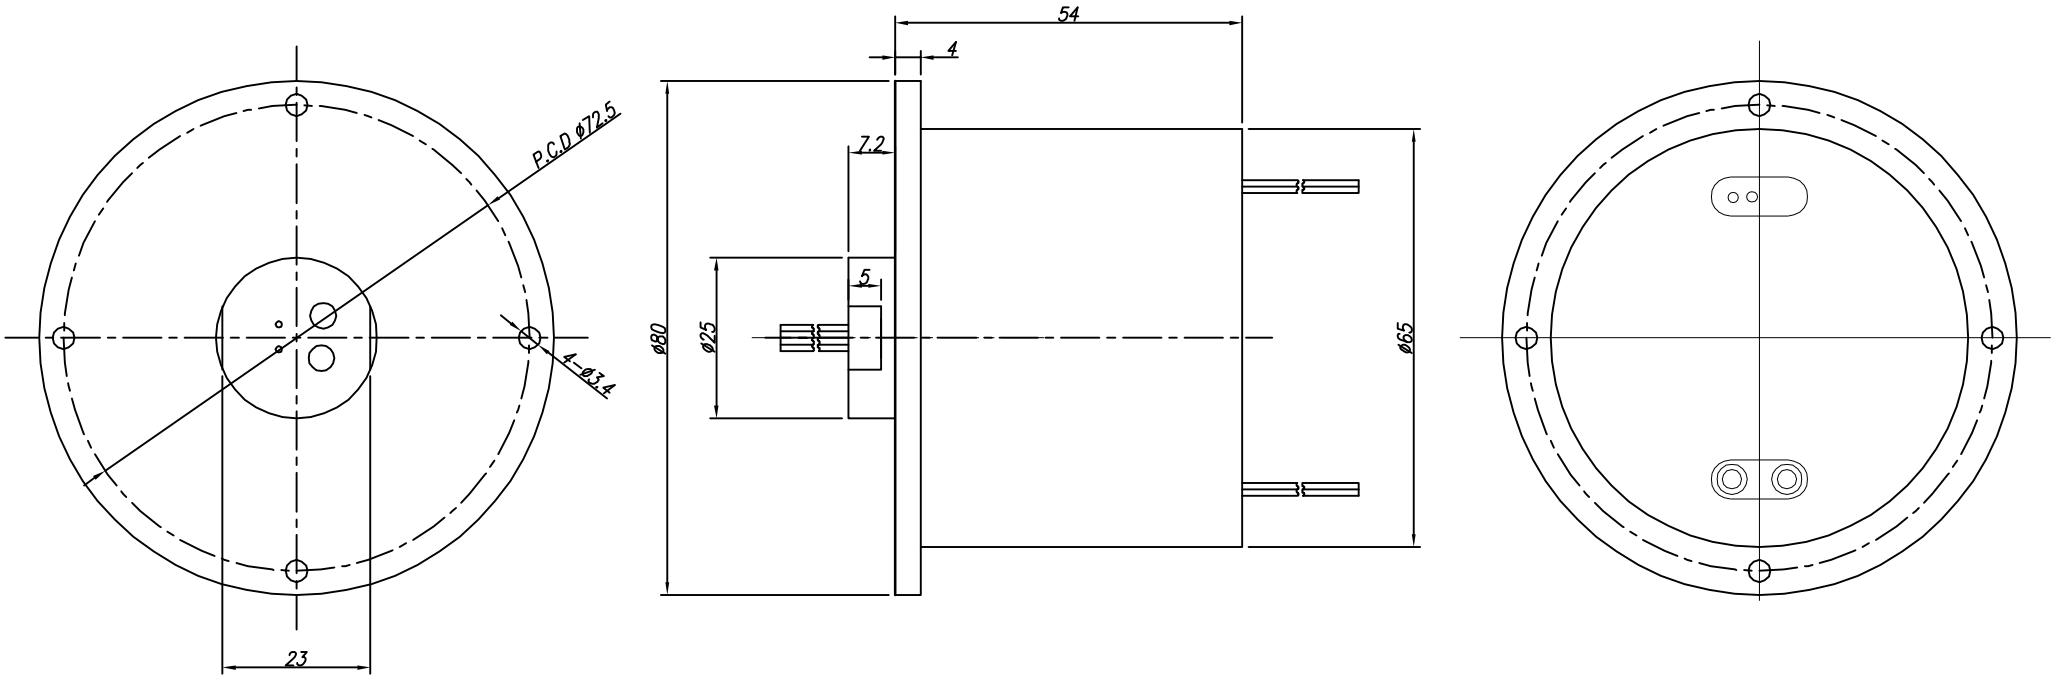

01	WR-SS0202(30A)				
NO	PART NAME	MATERIAL	Q'TY	COATING METHOD	REMARK

DRAWING	DISIGN	CHECKED	APROVE	PRINT SCALE	SIZE	PROJECTION
LEE.Y.S		KIM.W.B	KIM.W.B	N : S	A3	
				DATE	2017.12.1	

우리슬립링

TOLERANCE				
0 ~ 10	±0.02	CHAMFER	C = 0.3	
11 ~ 30	±0.05	FILLET	R = 0.3	
31 ~ 50	±0.10	ANGLE	±0°20'	
51 ~ 100	±0.15	HOLE PITCH	±0.05	
100 ~	±0.20			

DRAWING NO.
WR-SS0202(30A)-00-B

1/1