


SPECIFICATION	
Number of Circuit	5 amps/circuit (0.5SQ) , 60 amps/2circuit(16SQ)
Operating Speed	100rpm continuous
Lead Lengths	450mm
Voltage	Max. 240VDC/220VAC
Current Rating	60A 2circuit , 5A 2circuit
Contact Material	Gold to Gold
Lead Size/Type	Silver plated copper Type Teflon Insulated
Noise	100milliohms max

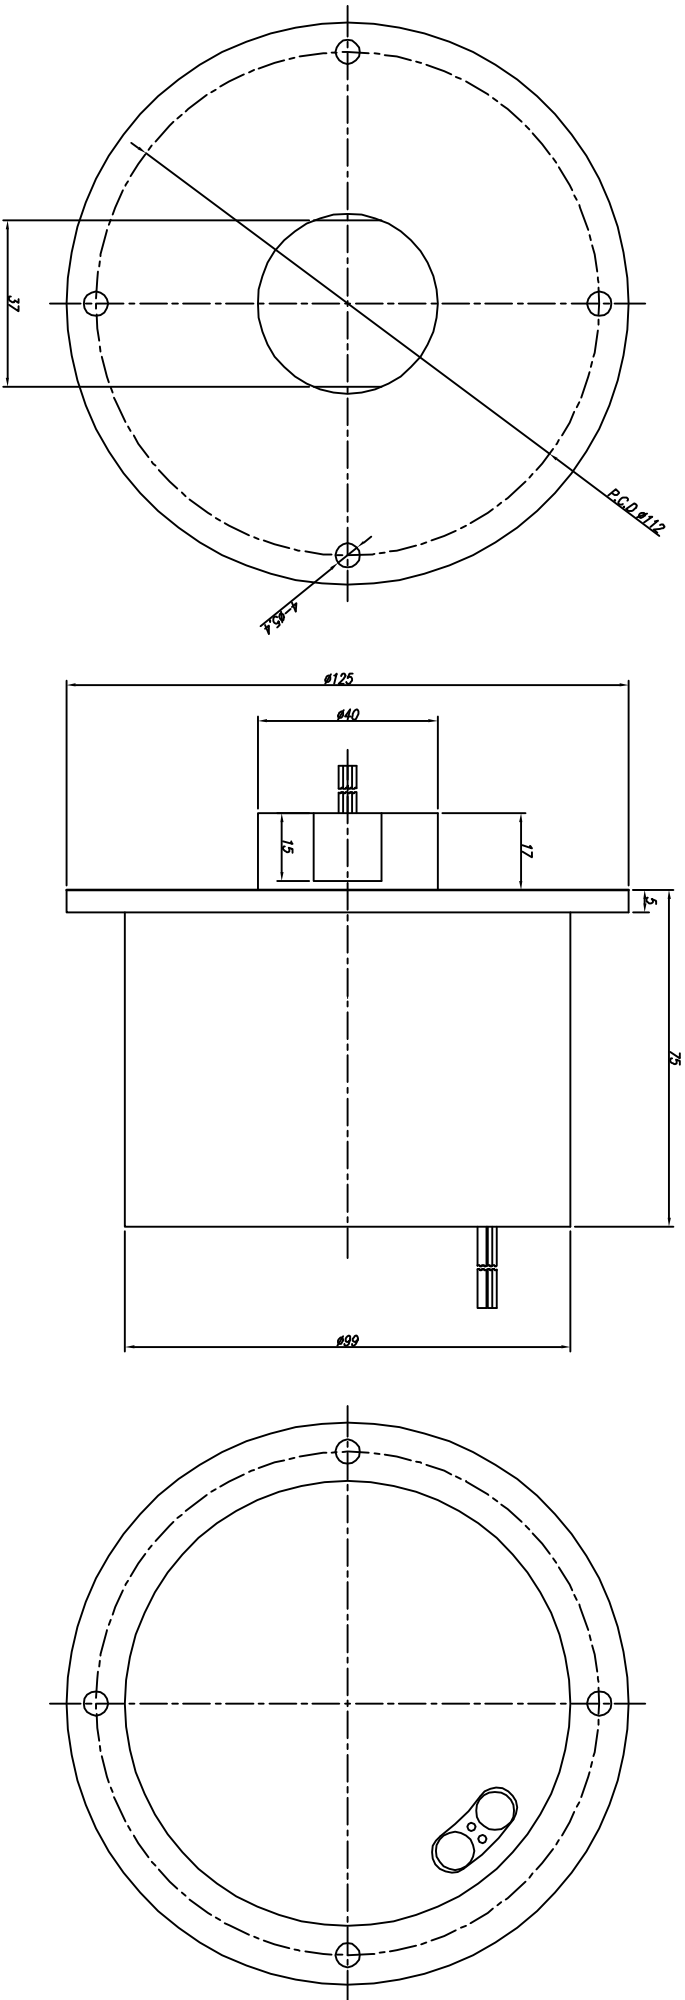

01	WR-SS0202(60A)																				
NO	PART NAME	CHECKED	APPROVE	MATERIAL	Q'TY	COATING METHOD	REMARK														
DRAWING	DESIGN	KIM,W.B			SIZE	PROJECTION															
LEE,Y.S				N : S	A3																
DATE		2007.12.1																			
TOLERANCE		0 ~ 10		±0.02		CHAMFER		C = 0.3													
11 ~ 30		±0.05		FILET		R = 0.3															
31 ~ 50		±0.10		ANGLE		40°±20															
51 ~ 100		±0.15		HOLE PITCH		±0.05															
100 ~		±0.20																			
DRAWING NO.		WR-SS0202(60A)-00-B																			
우 리 슬 리 링		1 / 1																			